
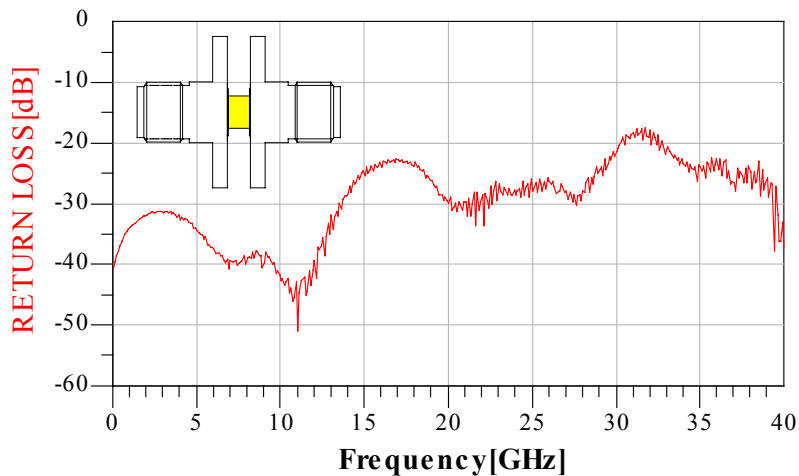


2.92 mm Connector Series

2.92 mm Connector Test Data

Back-to-Back Connector Testing

The back-to-back testing is configured by two connectors with a 50 Ohm seal.

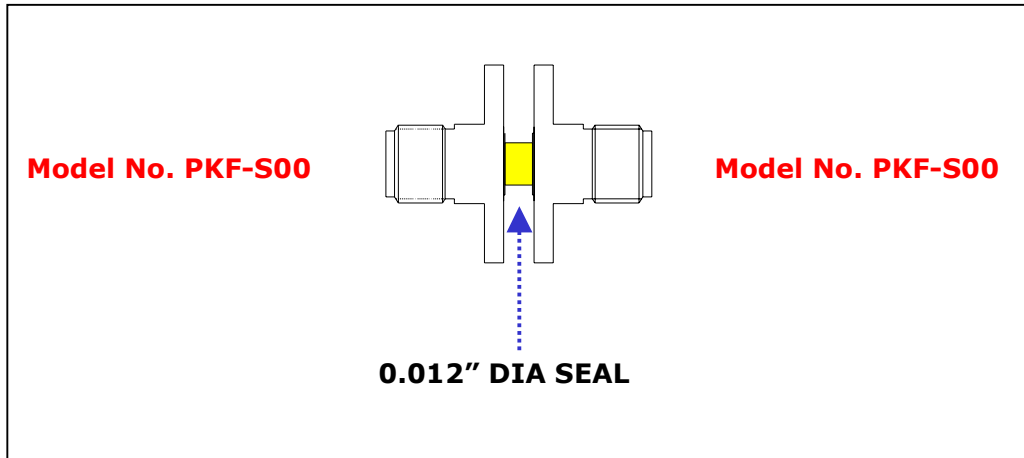

- Low VSWR
- DC to 27.0 GHz 1.15 :1 Max.
- 27.0 to 40 GHz.....1.23 : 1 Max.